

WAT-240E/CB (P3.7) 1/4" Miniature Camera


Compact cylindrical camera with Built-in lens & BNC output



Key features

- Resolution of 480TVL
- Versatile use for limited space, general surveillance, embedded system and part of image processing system
- ※Glass lenses and pinhole lens are not interchangeable

Dimensions

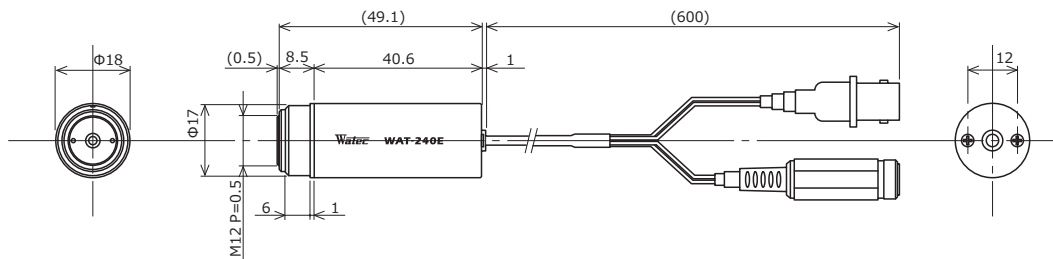

Specifications

| | | NTSC | PAL |
|------------------------------|-------|------------------------------------------------------------|----------------------|
| Video standard | | NTSC | PAL |
| Pick-up element | | 1/4 inch CMOS image sensor | |
| Number of effective pixels | | 648(H) × 488(V) | |
| Unit cell size | | 5.6μm(H) × 5.6μm(V) | |
| Imaging system | | RGB primary color bayer arrangement mosaic filters on chip | |
| Synchronizing system | | Internal | |
| Scanning system | | Progressive | |
| Video output | | Composite: 1.0 V(p-p) 75Ω (Unbalanced) | |
| Resolution (H) | | More than 480TVL (Center) | |
| Minimum illumination | | 0.3 lx F2.0 (AGC ON=42dB, Shutter=OFF) | |
| S/N | | More than 52dB (AGC OFF=0dB, γ=1.0) | |
| Function settings | | - | |
| AE mode | Fixed | - | |
| | EI | 1/60 - 1/100000 sec. | 1/50 - 1/100000 sec. |
| White balance | | ATW | |
| AGC | ON | 0 - 42dB | |
| | OFF | - | |
| MGC | | - | |
| Day/Night | | - | |
| Gamma characteristics | | γ≈0.45 | |
| Video level | | 85IRE | |
| Noise reduction | | - | |
| Wide dynamic range | | - | |
| Lens iris | | - | |
| Back light compensation | | BLC | |
| White blemish correction | | - | |
| Sharpness | | - | |
| Defog | | - | |
| Digital zoom | | - | |
| Privacy mask | | - | |
| Mirror image | | - | |
| Freeze | | - | |
| Motion detection | | - | |
| Neg.image | | - | |
| Interface | | BNC (Composite Video), Power in | |
| Power supply | | DC+5V - 6V | |
| Power consumption | | 0.66W/110mA (DC+6V) | |
| Operating temperature | | -10 - +50°C | |
| Storage temperature | | -30 - +70°C | |
| Operating / Storage humidity | | 95% RH or less (Without condensation) | |
| Lens mount | | M12 P=0.5 | |
| Standard lens | | 3720B-12P(B) (f3.7 F2.0) | |
| Cable length | | 600mm | |
| Weight | | Approx. 28g | |
| Accessories | | Ring holder | |

Accessories Options

