

WAT-902H3 SUPREME 1/3" High Sensitivity Camera


High sensitivity with compact and lightweight body



Key features

- Min. illumination 0.0005 lx. F1.4 (AGC HIGH=50dB, Shutter=OFF)
- NIR visibility for poor light condition
- Selectable AGC level and shutter speed for demanding scene conditions
- Video drive iris / DC drive iris auto select

Dimensions

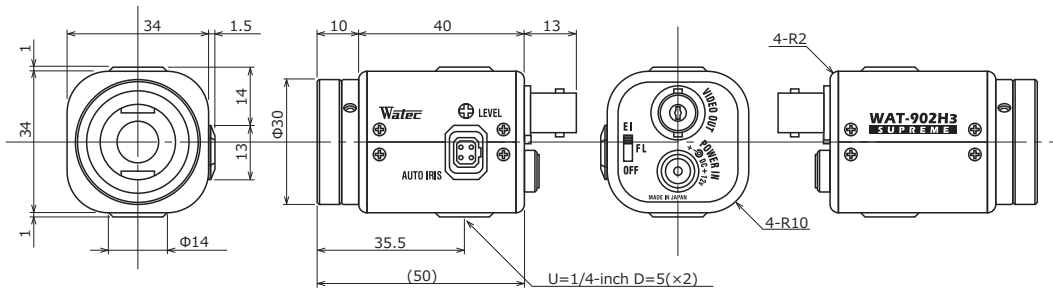


Specifications


Video standard		EIA	CCIR
Pick-up element		1/3 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		6.35μm(H) × 7.4μm(V)	6.5μm(H) × 6.25μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0.0005 lx F1.4 (AGC HIGH=50dB, Shutter=OFF)	
S/N		More than 46dB (AGC OFF=5dB, γ=1.0)	
Function settings		DIP Switch	
AE mode	Fixed	1/60, 1/100 sec.	1/50, 1/120 sec.
	EI	1/60 - 1/100000 sec.	1/50 - 1/100000 sec.
AGC	ON	5 - 32dB (LOW), 5 - 50dB (HIGH)	
	OFF	-	
MGC		-	
Gamma characteristics		γ≒0.45	
Video level		100IRE	
Noise reduction		-	
Wide dynamic range		-	
Lens iris		Video / DC (EIAJ, Auto-select)	
Back light compensation		BLC	
White blemish correction		-	
Sharpness		-	
Defog		-	
Digital zoom		-	
Privacy mask		-	
Mirror image		-	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		BNC (Composite Video), Power in, Auto iris	
Power supply		DC+12V±10%	
Power consumption		1.86W (155mA)	
Operating temperature		-10 - +40°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		CS mount	
Weight		Approx. 90g	
Accessories		WPDC12 (DC plug), AIC-G (Iris plug), Hex. Wrench	

Options


CS-mount lenses




13VG308ASIR II



13VG1040ASIR



TG4Z2813FCS-IR-2



TG5Z8513FCS-IR

Miniature lenses / Mount adaptors



3745B-13P



22PMA-M13-040



2520BC-12



0814BC-12



2920BC-12




1220BC-12



3820BC-12



M1616BC-12



22PMA-M12-125



0625BC-12




2540EX014-M12




0820BC-12

WAT-902H3 SUPREME



VIDEO OUT (BNC)

POWER IN (DC12V)



Cables



3C2V (BNC/BNC)

BNC




3C2V (BNC/RCA)

RCA



※Not in our lineup

Power supply adaptors



SWI12-12-N-P5



SWI12-12-E-P5


Stands




MS50



WH-31



WH-11



WH-21

C-mount Lenses

※Not in our lineup

C-mount adaptor




30CMA-R


Water resistant camera housing / Mounting brackets



VCHO-15S



WH-6N



PTP-300